

**FRIZIONI  
PNEUMATICHE  
Serie ACS**

**PNEUMATIC  
CLUTCHES  
Model ACS**


### PRESTAZIONI (6 bar) – PERFORMANCES (6 bar)

tipo - size	coppia - torque (Nm)	giri/min RPM	V aria - air V (l)	J (mozzo+dischi) - J (hub+discs) (kgm <sup>2</sup> )	peso - weight (kg)
ACS 114•214	120 • 240	2000	0,03	0,003 • 0,004	3 • 3,5
ACS 120•220•320	295 • 590 • 885	2800	0,04	0,005 • 0,008 • 0,009	7 • 11 • 12
ACS 125•225•325	580 • 1170 • 1740	2300	0,08	0,009 • 0,019 • 0,022	13 • 18 • 19
ACS 130•230•330	1120 • 2240 • 3360	1700	0,15	0,030 • 0,060 • 0,075	21 • 30 • 34
ACS 140•240•340	3270 • 6540 • 9810	1200	0,48	0,200 • 0,300 • 0,325	63 • 78 • 86
ACS 150•250•350	6800 • 13600 • 20400	1000	0,70	0,500 • 0,900 • 1,125	99 • 141 • 154
ACS 160•260•360	9050 • 18100 • 27150	900	1,09	0,825 • 1,625 • 2,200	120 • 186 • 244
ACS 167•267•367	12760 • 25520 • 38260	800	1,38	1,825 • 3,575 • 4,575	183 • 281 • 326
ACS 174•274•374	18000 • 36000 • 54000	700	1,80	2,825 • 5,500 • 7,000	260 • 390 • 460

### DIMENSIONI (mm) - DIMENSIONS (mm)

tipo - size	A f8	B	C max	D	E	F	H	L	M	N	S
ACS 114•214	142	50	35	128	4xM6	1/4"G	-	126	23	2	0,3
ACS 120•220•320	195	75	55	185	M5	3/8"G	116	122•147•147	33•63•63	10•15•15	0,5
ACS 125•225•325	235	95	75	223	M6	1/2"G	138	139•167•167	37•71•71	10•15•15	0,8
ACS 130•230•330	300	125	100	284	M8	1/2"G	183	145•177•177	42•80•80	12•17•17	0,8
ACS 140•240•340	405	190	155	385	M10	1"G	253	211•250•250	52•98•98	15•20•20	1
ACS 150•250•350	505	240	205	480	M12	5/4"G	312	229•276•276	64•118•118	18•25•25	1
ACS 160•260•360	590	270	225	562	M14	6/4"G	357	236•305•305	72•130•130	20•25•25	1
ACS 167•267•367	670	330	285	637	M16	6/4"G	437	265•324•324	81•147•147	23•30•30	1,5
ACS 174•274•374	740	330	285	708	M18	2"G	457	298•363•363	97•170•170	32•40•40	1,5

### DENOMINAZIONE PARTICOLARI - PARTS NAME

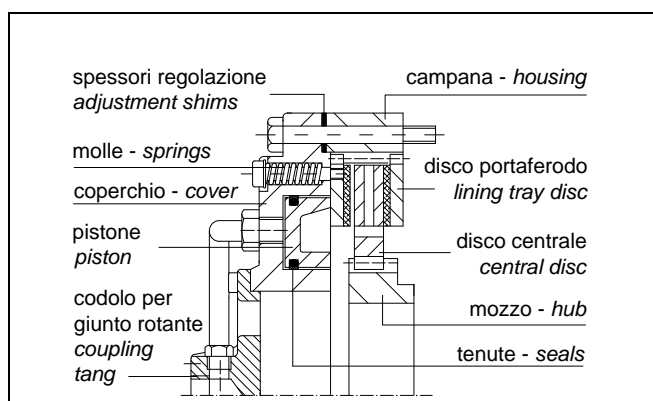

### ESEMPIO MONTAGGIO - MOUNTING EXAMPLE

