

## Active Clutch Line

Electromagnetic single-surface clutch

86 011..E00

86 021..E00

86 051..E00

86 053..E00



## Kendrion – the brake experts

**As a solution provider, Kendrion develops, produces and markets innovative and high-quality electromagnetic and mechatronic systems and components for customers all over the world.**

In the Industrial Drive Systems business unit, electromagnetic brakes and clutches are developed and produced for industrial drive engineering. They are used for the accelerating, braking, positioning, holding and securing of movable drive components and loads. Areas of application for our brakes and clutches are primarily in the areas of robotic and automatic control engineering, machine tool and production machinery as well as medical technology and material handling.

Our main site is located in Villingen in the Black Forest, Germany. Industrial Drive Systems can also rely on additional production sites and subsidiaries in Aerzen (Germany), China, Great Britain and Italy, as well as numerous sales partners all over the world.

### Tradition and progress

The long-established BINDER brand laid the foundations for the successful development of Industrial Drive Systems. In the year 1911, Wilhelm Binder founded his company and began at the start of the 1920s with the development and production of electromagnetic components. In 1997, the company was taken over by the Dutch group Schuttersveld N.V., today Kendrion N.V..

The former magneta GmbH & Co. KG belongs to the Kendrion Group since 2010. As the present Kendrion (Aerzen) GmbH, the innovative company continues to develop and produce electromagnetic clutches and brakes along with magnetic particle clutches and brakes at its site in Aerzen.

### Kobra greensigned safety brakes

As the first company, we at Kendrion developed safety brakes that contribute to the well-being of the environment in two separate ways. The reduced energy consumption was just as important to us as the ecology in the entire value-creation process. The KOBRA (Kendrion Optimised Brake) spring-applied safety brake is the impressive result, and the pioneer product of the Kendrion greensigned strategy.

### Kendrion – We magnetise the world!

[www.kendrion.com](http://www.kendrion.com)



# About the Active Clutch Line

The Active Clutch Line is comprised of DC operated single-disc clutches without slip ring, characterised by the fact that the dynamic effect of an electromagnetic field is used for torque transmission (electromagnetically engaged clutches). Active Clutch Line products ensure reliable clutch release with zero

residual torque in any mounting position and zero backlash during torque transmission. These clutches require little if any maintenance throughout their service span. The achievable switching power depends on the clutch version employed.

## Versions

### 86 011..E00

torque range 0.2 - 150 Nm  
DC  
front mounting

### 86 021..E00

torque range 0.2 - 150 Nm  
DC  
flange mounting

### 86 051..E00

torque range 0.2 - 2.2 Nm  
DC  
shaft mounting

### 86 053..E00

torque range 5 - 150 Nm  
DC  
shaft mounting with connecting terminal

Upon request, the clutch can be supplied with variable armature systems (shaft coupling).

## Applications

Automotive technology

Equipment manufacturing industry

Handling technology

Building installations

Medical technology

Packaging machinery...


## Data sheets – General information

The Operating Instructions must be strictly observed during the set-up of the machine (e.g. motor) and during the start-up, operation and maintenance of the brakes. The state-of-the-art brakes have been designed, built and tested in accordance with the requirements of DIN VDE 0580 concerning electromagnetic devices and components. Additional information on technical specifications given in the data sheets is included in the operating instructions.



# Electromagnetic single-surface clutch DC


Version	86 011..E00 - front mounting
Standard rated voltages	24 V DC
Protection	IP 00
Thermal class	F
Rated torque	0.2 - 150 Nm
Note	Specification subject to change without notice. The „General technical information“ and the „Operating instructions“ 86 011..E00 must be strictly observed.

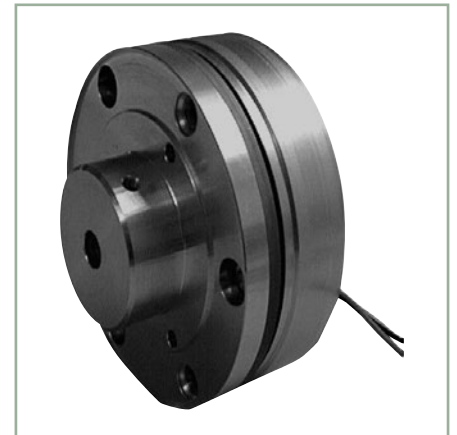

## Technical data

Size	Rated torque $M_2$ [Nm]	Max. speed $n_{max}$ [rpm]	Max. switching power $P_{max}$ [kJ/h]	Max. switching energy (Z = 1) $W_{max}$ [kJ]	Rated power $P_N$ [W]	Response times		Moment of inertia		Weight (without flange hub) $m$ [kg]
						Coupling time $t_1$ [ms]	Disconnection time $t_2$ [ms]	Armature (without flange hub) $J$ [kgcm <sup>2</sup> ]	Magnet system $J$ [kgcm <sup>2</sup> ]	
03	0.2	16000	65	0.9	6	13	12	0.01	0.06	0.06
04	1	12000	100	1.6	8	15	16	0.05	0.17	0.15
06	2.2	10000	160	4.5	10	15	18	0.22	0.55	0.35
07	5	8000	250	6	12	25	25	0.65	2.45	0.65
09	11	6000	350	11	17	45	38	2.1	7	1.15
11	21	4800	500	30	22	70	40	5.7	20	2
14	60	3600	700	53	35	110	65	20	36	4
17	80	3000	1000	80	40	110	70	48	85	7.4
21	150	2500	1300	110	45	150	90	97	217	11

## Dimensions [mm]

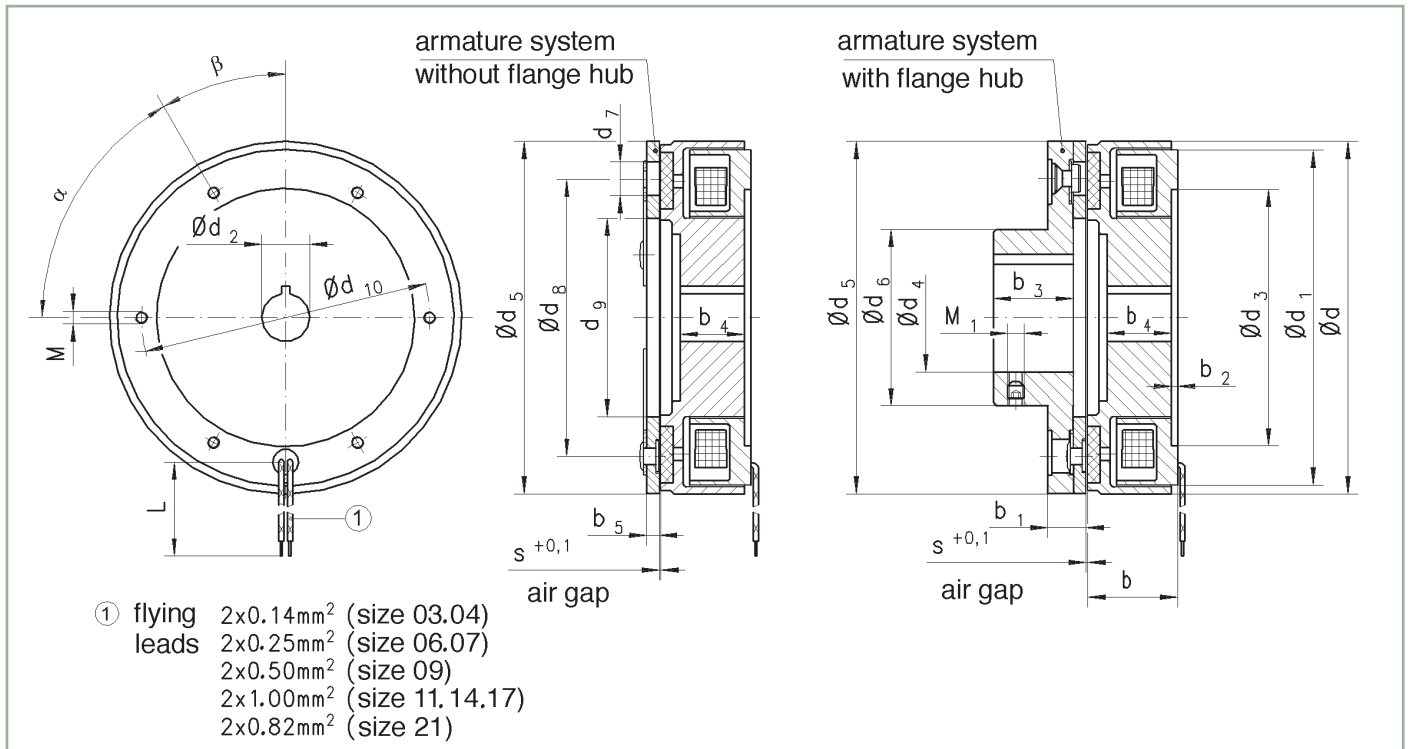

Size	d	d <sub>1</sub> (h7)	d <sub>2</sub> (H7)	d <sub>3</sub> (H7)	d <sub>4</sub> (H7)	d <sub>5</sub>	d <sub>6</sub>	d <sub>7</sub>	d <sub>8</sub>	d <sub>9</sub>	d <sub>10</sub>	b	b <sub>1</sub>
03	28	26	5 <sup>1)</sup> / 6 <sup>2)</sup>	16	5 <sup>1)</sup> / 6 <sup>2)</sup>	28	14	5/2x180°	19.5	12	22	15	5
04	39.5	37	5 <sup>1)</sup> / 12 <sup>2)</sup>	28	6 <sup>1)</sup> / 8 <sup>2)</sup>	39.5	16	7/2x180°	29	17	32.5	17.5	6
06	56	53	6 <sup>1)</sup> / 20 <sup>2)</sup>	42	6 <sup>1)</sup> / 15 <sup>2)</sup>	56	24	7/3x120°	46	28	48	19	8
07	70	66.5	10 <sup>1)</sup> / 30 <sup>2)</sup>	55	10 <sup>1)</sup> / 20 <sup>2)</sup>	70	30	8.5/3x120°	60	37	61	23	9.5
09	90	85.5	10 <sup>1)</sup> / 40 <sup>2)</sup>	68	10 <sup>1)</sup> / 30 <sup>2)</sup>	90	40	10.5/3x120°	76	46	75	24.5	12
11	110	104	15 <sup>1)</sup> / 50 <sup>2)</sup>	80	15 <sup>1)</sup> / 35 <sup>2)</sup>	110	50	12/3x120°	95	59	90	28	14
14	140	134	20 <sup>1)</sup> / 70 <sup>2)</sup>	110	20 <sup>1)</sup> / 48 <sup>2)</sup>	140	70	16/3x120°	120	75	120	33.5	16
17	175	167	20 <sup>1)</sup> / 70 <sup>2)</sup>	125	20 <sup>1)</sup> / 68 <sup>2)</sup>	170	86	16/3x120°	135	88	140	42.5	16
21	210	200	25 <sup>1)</sup> / 80 <sup>2)</sup>	150	25 <sup>1)</sup> / 80 <sup>2)</sup>	202	105	18/3x120°	158	114	167	43	19

Size	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>	b <sub>5</sub>	L	s	s <sub>max</sub>	M	M <sub>1</sub>	α	β
03	1	10	9	2	400	0.2	0.3	4xM2/3tief	2xM3	4x90°	45°
04	2	15	10	2.5	400	0.2	0.5	6xM2/3tief	2xM3	6x60°	30°
06	2	17	12	3	400	0.2	0.5	6xM3/4tief	2xM4	6x60°	30°
07	2	20	15	3.5	400	0.2	0.5	6xM3/5tief	2xM4	6x60°	30°
09	2	25	17	4	400	0.3	0.75	6xM3/5tief	2xM5	6x60°	30°
11	2	30	20	5	400	0.3	0.75	6xM4/6tief	2xM6	6x60°	30°
14	2.5	40	24	6.5	400	0.3	0.75	6xM5/8tief	2xM8	6x60°	30°
17	2.5	42	39	6.5	400	0.3	0.75	6xM6/8tief	2xM8	6x60°	30°
21	3	45	39	7	400	0.4	1	6xM8/8tief	2xM10	6x60°	30°

<sup>1)</sup> Min. bore.

<sup>2)</sup> Max. bore.

# Electromagnetic single-surface clutch DC


Version	86 021..E00 - flange mounting
Standard rated voltages	24 V DC
Protection	IP 00
Thermal class	F
Rated torques	0.2 - 150 Nm
Note	Specification subject to change without notice. The „General technical information“ and the „Operating instructions“ 86 021..E00 must be strictly observed.



## Technical data

Size	Rated torque	Max. speed	Max. switching power	Max. switching energy (Z = 1)	Rated power	Response times		Moment of inertia		Weight (without flange hub)
						Coupling time	Disconnection time	Armature (without flange hub)	Magnet system	
	$M_2$ [Nm]	$n_{max}$ [rpm]	$P_{max}$ [kJ/h]	$W_{max}$ [kJ]	$P_N$ [W]	$t_1$ [ms]	$t_2$ [ms]	J [kgcm <sup>2</sup> ]	J [kgcm <sup>2</sup> ]	m [kg]
03	0.2	16000	65	0.9	6	13	12	0.01	0.06	0.06
04	1	12000	100	1.6	8	15	16	0.05	0.17	0.15
06	2.2	10000	160	4.5	10	15	18	0.22	0.55	0.35
07	5	8000	250	6	12	25	25	0.65	2.45	0.65
09	11	6000	350	11	17	45	38	2.1	7	1.15
11	21	4800	500	30	22	70	40	5.7	20	2
14	60	3600	700	53	35	110	65	20	36	4
17	80	3000	1000	80	40	110	70	48	85	7.4
21	150	2500	1300	110	45	150	90	97	217	11

## Dimensions [mm]

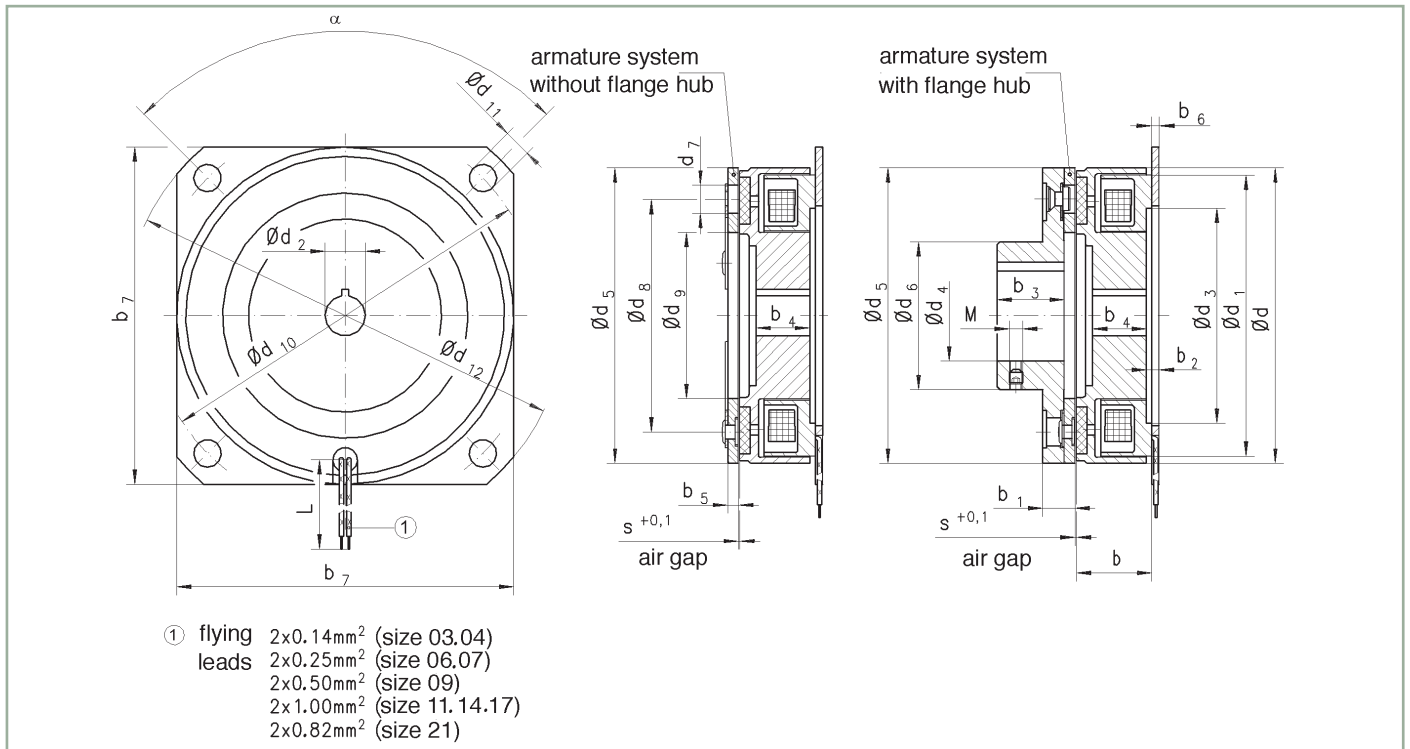

Size	d	d <sub>1</sub> (h7)	d <sub>2</sub> (H7)	d <sub>3</sub> (H7)	d <sub>4</sub> (H7)	d <sub>5</sub>	d <sub>6</sub>	d <sub>7</sub>	d <sub>8</sub>	d <sub>9</sub>	d <sub>10</sub>	d <sub>11</sub>	d <sub>12</sub>
03	28	26	5 <sup>1)</sup> / 6 <sup>2)</sup>	16	5 <sup>1)</sup> / 6 <sup>2)</sup>	28	14	5/2x180°	19.5	12	33.5	2.6	38.5
04	39.5	37	5 <sup>1)</sup> / 12 <sup>2)</sup>	28	6 <sup>1)</sup> / 8 <sup>2)</sup>	39.5	16	7/2x180°	29	17	54	3.5	62.5
06	56	53	6 <sup>1)</sup> / 20 <sup>2)</sup>	42	6 <sup>1)</sup> / 15 <sup>2)</sup>	56	24	7/3x120°	46	28	65	4.5	75.5
07	70	66.5	10 <sup>1)</sup> / 30 <sup>2)</sup>	55	10 <sup>1)</sup> / 20 <sup>2)</sup>	70	30	8.5/3x120°	60	37	79.5	5.5	89.5
09	90	85.5	10 <sup>1)</sup> / 40 <sup>2)</sup>	68	10 <sup>1)</sup> / 30 <sup>2)</sup>	90	40	10.5/3x120°	76	46	102	6.5	115.5
11	110	104	15 <sup>1)</sup> / 50 <sup>2)</sup>	80	15 <sup>1)</sup> / 35 <sup>2)</sup>	110	50	12/3x120°	95	59	127	9	143.5
14	140	134	20 <sup>1)</sup> / 70 <sup>2)</sup>	110	20 <sup>1)</sup> / 48 <sup>2)</sup>	140	70	16/3x120°	120	75	155	9	170.5
17	175	167	20 <sup>1)</sup> / 70 <sup>2)</sup>	125	20 <sup>1)</sup> / 68 <sup>2)</sup>	170	86	16/3x120°	135	88	185	9	200
21	210	200	25 <sup>1)</sup> / 80 <sup>2)</sup>	150	25 <sup>1)</sup> / 80 <sup>2)</sup>	202	105	18/3x120°	158	114	215	9	230

Size	b	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>	b <sub>5</sub>	b <sub>6</sub>	b <sub>7</sub>	L	s	s <sub>max</sub>	M	α
03	15	5	2.5	10	9	2	1.5	28	400	0.2	0.3	2xM3	4x90°
04	17.5	6	4	15	10	2.5	2	45	400	0.2	0.5	2xM3	4x90°
06	19	8	4	17	12	3	2	56	400	0.2	0.5	2xM4	4x90°
07	23	9.5	4.5	20	15	3.5	2.5	70	400	0.2	0.5	2xM4	4x90°
09	24.5	12	4.5	25	17	4	2.5	90	400	0.3	0.75	2xM5	4x90°
11	28	14	5	30	20	5	3	110	400	0.3	0.75	2xM6	4x90°
14	33.5	16	6.5	40	24	6.5	4	140	400	0.3	0.75	2xM8	4x90°
17	42.5	16	7	42	39	6.5	4.5	-	400	0.3	0.75	2xM8	4x90°
21	43	19	8	45	39	7	5	-	400	0.4	1	2xM10	4x90°

<sup>1)</sup> Min. bore.

<sup>2)</sup> Max. bore.



# Electromagnetic single-surface clutch DC

Version	86 051..E00 - shaft mounting
Standard rated voltages	24 V DC
Protection	IP 00
Thermal class	F
Rated torques	0.2 - 2.2 Nm
Note	Specification subject to change without notice. The „General technical information“ and the „Operating instructions“ 86 051..E00 must be strictly observed.




## Technical data

Size	Rated torque	Max. speed	Max. switching power	Max. switching energy (Z = 1)	Rated power	Response times		Moment of inertia		Weight (without flange hub)
						Coupling time	Disconnection time	Armature (without flange hub)	Magnet system	
	$M_2$ [Nm]	$n_{max}$ [rpm]	$P_{max}$ [kJ/h]	$W_{max}$ [kJ]	$P_N$ [W]	$t_1$ [ms]	$t_2$ [ms]	J [kgcm <sup>2</sup> ]	J [kgcm <sup>2</sup> ]	m [kg]
03	0.2	16000	65	0.9	6	13	12	0.01	0.06	0.06
04	1	12000	100	1.6	8	15	16	0.05	0.17	0.15
06	2.2	10000	160	4.5	10	15	18	0.22	0.55	0.35



Dimensions [mm]

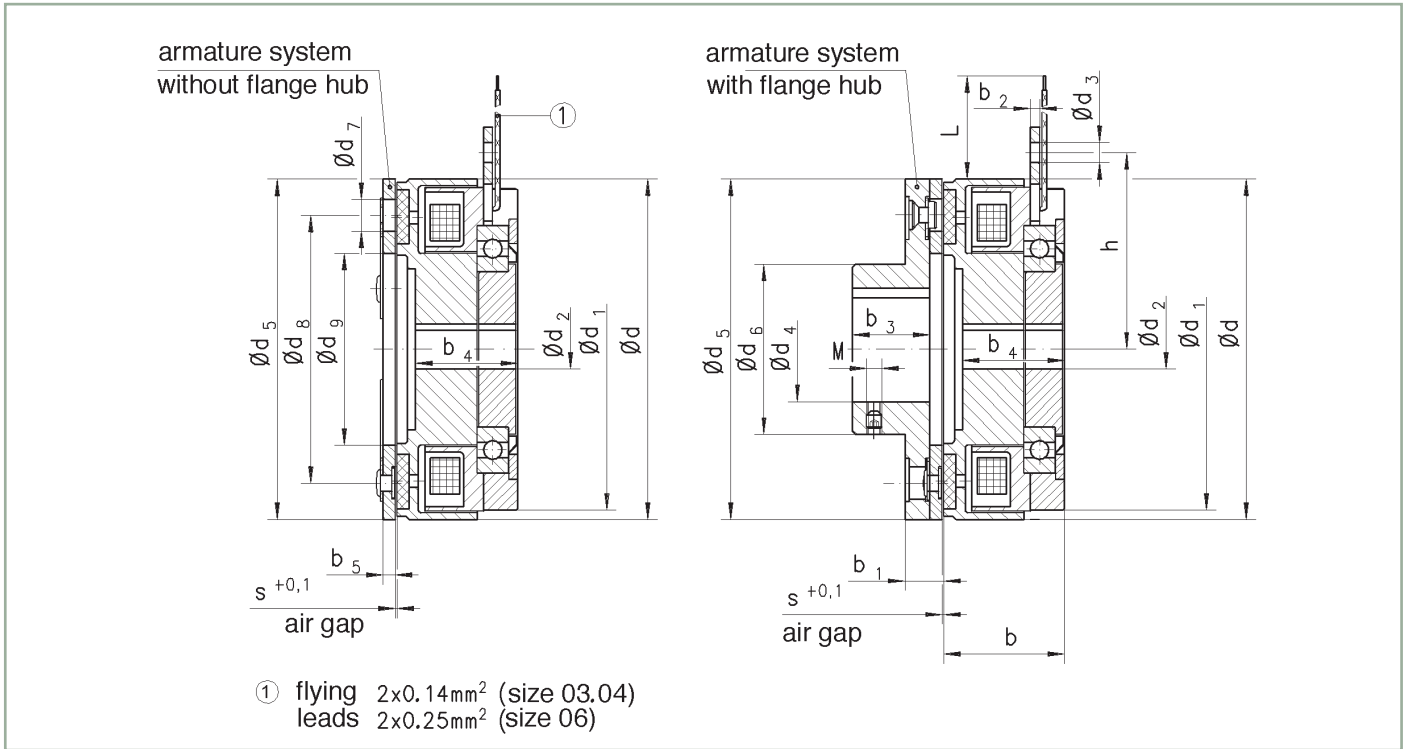

Size	d	d <sub>1</sub>	d <sub>2</sub> (H7)	d <sub>3</sub>	d <sub>4</sub> (H7)	d <sub>5</sub>	d <sub>6</sub>	d <sub>7</sub>	d <sub>8</sub>	d <sub>9</sub>
03	28	26	5	4.2	5 <sup>1)</sup> / 6 <sup>2)</sup>	28	14	5/2x180°	19.5	12
04	39.5	37	5 <sup>1)</sup> / 8 <sup>2)</sup>	4.2	5 <sup>1)</sup> / 8 <sup>2)</sup>	39.5	16	7/2x180°	29	17
06	56	53	6 <sup>1)</sup> / 12 <sup>2)</sup>	4.2	6 <sup>1)</sup> / 15 <sup>2)</sup>	56	24	7/3x120°	46	28

Size	b	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>	b <sub>5</sub>	h	L	s	s <sub>max</sub>	M
03	20	5	1.5	10	14	2	19.2	400	0.2	0.45	2xM3
04	24.5	6	1.5	15	19	2.5	24.8	400	0.2	0.5	2xM3
06	27.5	8	1.5	17	22.5	3	32.8	400	0.2	0.5	2xM3

<sup>1)</sup> Min. bore.

<sup>2)</sup> Max. bore.

# Elektromagnetic single-surface clutch DC


Version	86 053..E00 - shaft mounting with connection terminal
Standard rated voltages	24 V DC
Protection	IP 00
Thermal class	F
Rated torques	5 - 150 Nm
Note	Specification subject to change without notice. The „General technical information“ and the „Operating instructions“ 86 053..E00 must be strictly observed.



## Technical data

Size	Rated torque	Max. speed	Max. switching power	Max. switching energy (Z = 1)	Rated torque	Response times		Moment of inertia		Weight (without flange hub)
						Coupling time	Disconnection time	Armature (without flange hub)	Magnet system	
	$M_2$ [Nm]	$n_{max}$ [rpm]	$P_{max}$ [kJ/h]	$W_{max}$ [kJ]	$P_N$ [W]	$t_1$ [ms]	$t_2$ [ms]	J [kgcm <sup>2</sup> ]	J [kgcm <sup>2</sup> ]	m [kg]
07	5	8000	250	6	12	25	25	0.65	2.45	0.65
09	11	6000	350	11	17	45	38	2.1	7	1.15
11	21	4800	500	30	22	70	40	5.7	20	2
14	60	3600	700	53	35	110	65	20	36	4
17	80	3000	1000	80	40	110	70	48	85	7.4
21	150	2500	1300	110	45	150	90	97	217	11

## Dimensions [mm]

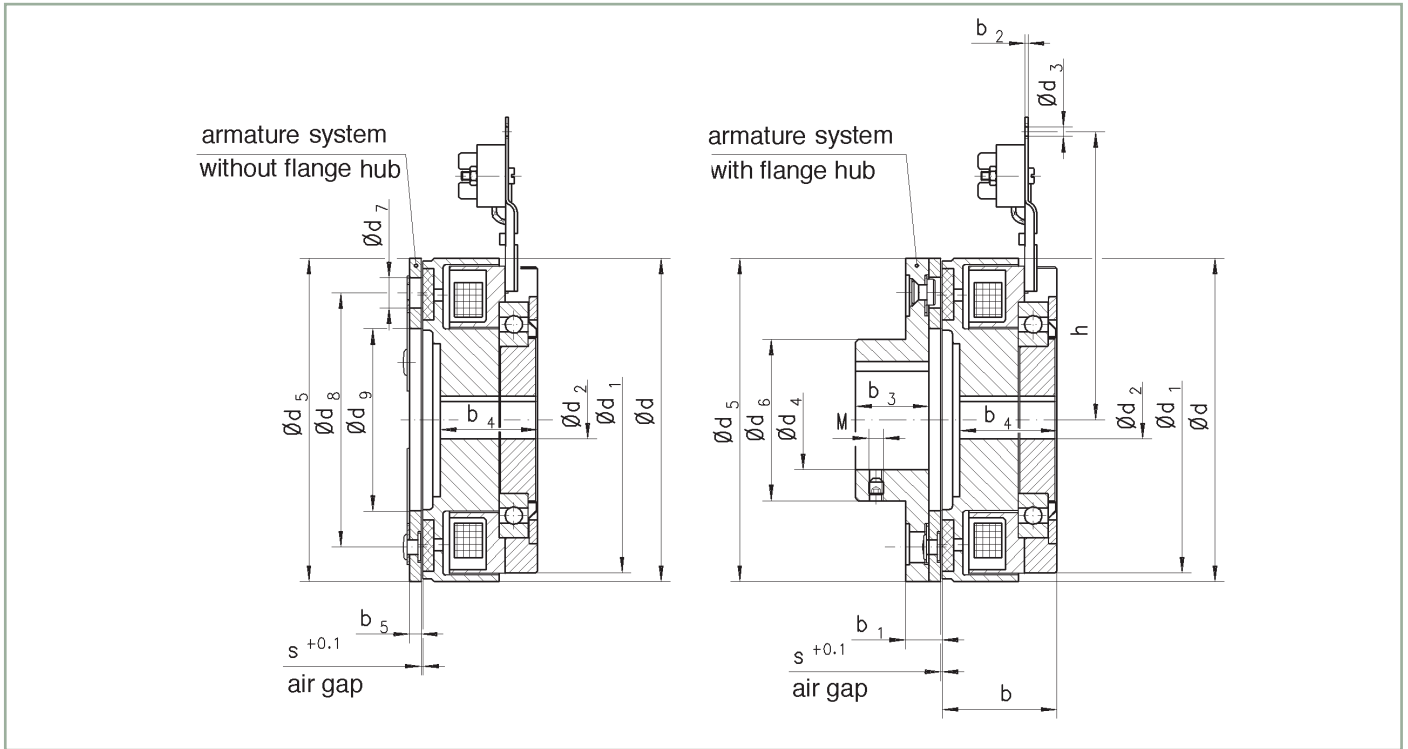

Size	d	d <sub>1</sub>	d <sub>2</sub> (H7)	d <sub>3</sub>	d <sub>4</sub> (H7)	d <sub>5</sub>	d <sub>6</sub>	d <sub>7</sub>	d <sub>8</sub>	d <sub>9</sub>
07	70	66.5	10 <sup>1)</sup> / 22 <sup>2)</sup>	5	10 <sup>1)</sup> / 20 <sup>2)</sup>	70	30	8.5/3x120°	60	37
09	90	85.5	10 <sup>1)</sup> / 28 <sup>2)</sup>	5	10 <sup>1)</sup> / 30 <sup>2)</sup>	90	40	10.5/3x120°	76	46
11	110	104	15 <sup>1)</sup> / 38 <sup>2)</sup>	5	15 <sup>1)</sup> / 35 <sup>2)</sup>	110	50	12/3x120°	95	59
14	140	134	20 <sup>1)</sup> / 55 <sup>2)</sup>	5	20 <sup>1)</sup> / 48 <sup>2)</sup>	140	70	16/3x120°	120	75
17	175	167	20 <sup>1)</sup> / 65 <sup>2)</sup>	5	20 <sup>1)</sup> / 68 <sup>2)</sup>	170	86	16/3x120°	135	88
21	210	200	25 <sup>1)</sup> / 80 <sup>2)</sup>	5	25 <sup>1)</sup> / 80 <sup>2)</sup>	202	105	18/3x120°	158	114

Size	b	b <sub>1</sub>	b <sub>2</sub>	b <sub>3</sub>	b <sub>4</sub>	b <sub>5</sub>	h	s	s <sub>max</sub>	M
07	32.5	9.5	1	20	26.5	3.5	82	0.2	0.5	2xM4
09	34	12	1	25	28.5	4	89	0.3	0.75	2xM5
11	38.5	14	1	30	32.5	5	97.5	0.3	0.75	2xM6
14	47	16	1	40	40	6.5	111.5	0.3	0.75	2xM8
17	57	16	1	42	56	6.5	124.5	0.3	0.75	2xM8
21	60.5	19	1	45	59.5	7	149.5	0.4	1	2xM10

<sup>1)</sup> Min. bore.

<sup>2)</sup> Max. bore.



INDUSTRIAL

WE MAGNETISE THE WORLD

Kendrion (Villingen) GmbH  
Wilhelm-Binder-Strasse 4-6  
78048 Villingen-Schwenningen  
Germany  
Tel: +49 7721 877-0  
Fax: +49 7721 877-1462  
sales-ids@kendrion.com  
www.kendrion.com