

**FRENI ELETTRIMAGNETICI A  
DENTINI NEGATIVI  
A MOLLE  
Serie MED**

**TOOTH ELECTROMAGNETIC  
SPRING LOADED BRAKES  
Model MED**


**PRESTAZIONI ( 24VCC ) • PERFORMANCES (24 VDC)**

tipo size	coppia – torque (Nm)	potenza – power (W)	giri/min - RPM		numero dentini teeth number	peso – weight (kg)
			a secco-dry	in olio-wet		
MED 095	30	39	4000	2000	80	1,2
MED 106	60	42	3500	2000	100	2
MED 114	90	48	3000	2000	145	3
MED 126	150	65	3000	1500	240	6
MED 140	240	89	2500	1000	480	9,5
MED 166	380	111	2000	1000	700	11,5
MED 185	600	125	1500	1000	980	20
MED 215	950	130	1500	1000	1.100	25

**DIMENSIONI (mm) • DIMENSIONS (mm)**

tipo - size	A	B H7	C max	D H7	E	F	G	H	K	L	M	N	P	S
MED 095	92	75	25	52	8,5	2	40	4x5,5	2x5	33,5	64	81,75	12	1,3
MED 106	106	85	25	65	8,5	2	44,5	4x5,5	2x6	38	75	94,4	11,5	1,3
MED 114	114	100	32	70	11,5	2	50,5	4x6,5	2x6	41	85	102,6	12,3	1,3
MED 126	125	105	35	75	13,5	2	58	4x6,5	2x6	47	90	112,25	12	1,3
MED 140	140	115	42	85	14	3	67	4x6,5	2x8	57	100	125,85	13,5	1,3
MED 166	166	130	48	95	17	3	75,5	6x8,5	3x8	62	115	148,9	15,4	1,4
MED 185	185	155	50	115	19	3	85	6x8,5	3x8	71	135	170	17	1,4
MED 215	215	180	60	130	23	4	100,5	6x8,5	3x8	84	155	198	17	1,4

**DENOMINAZIONE PARTI • PARTS NAME**

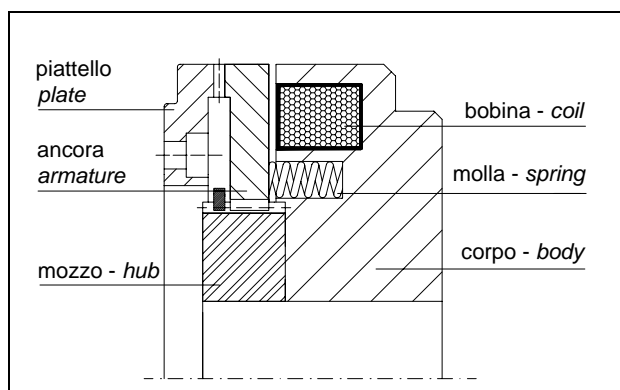

**ESEMPIO MONTAGGIO • MOUNTING EXAMPLE**

